


> SEV 100KW

50 – 100 LITRES



- > Five bolt flange for easy access and periodical maintenance
- > Various models with capacity from 50 to 100 litres
- > Voltage: 220~240 V 50-60 H
- > Stainless Steel Heating Element
- > Titanium Healthy Blue silicon glasslined
- > Neoprene Gasket System
- > Magnesium sacrificial anode for added protection
- > Temperature level indicator
- > On/off light indicator
- > Pressure relief valve set to 6 bar
- > Manual external temperature adjustment
- > 3 years warranty on tank

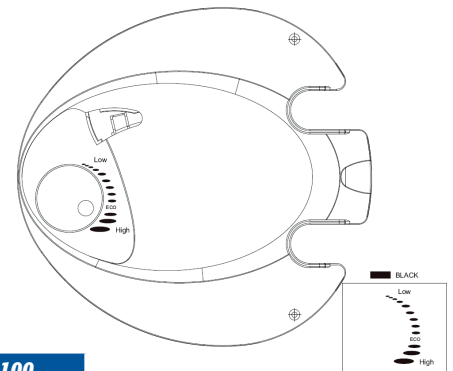

| SEV | | SEV-50 | SEV-80 | SEV-100 |
|---------------------|---------------|-------------|-------------|-------------|
| DHW tapping profile | | M | M | L |
| ERP Class | (G - A Class) | C | C | C |
| Capacity | litres | 47.5 | 76 | 97 |
| Power | kW | 3 | 3 | 3 |
| Heating time | ΔT 35° C | 40.7' | 65.1' | 83.1' |
| | ΔT 45° C | 52.3' | 83.7' | 106.9' |
| Weight | EMPTY | 18.0 | 22.7 | 26.9 |
| | FULL | 65.5 | 98.7 | 123.9 |
| Water Connections | inches | 1/2" M | 1/2" M | 1/2" M |
| Dimensions | WxHxD | 450x578x480 | 450x809x480 | 450x973x480 |
| CODE | | GRDR4W0A | GRDR6W0A | GRDR7W0A |

FEATURES



EASY TO MAINTAIN



OPERATING LIGHT



TEMPERATURE ADJUSTMENT



ON/OFF SWITCH



INGRESS PROTECTION IPX4



RUST FREE



SHOCK-PROOF CASING



BLUE FOREVER HEATING ELEMENT